


## DESCRIPTION

High performance and strong design. High quality connectors; Individually packed. Available with yellow outer jacket. Dust protection caps and cable boots included. Duplex clip in SC, LC and E2000 connector, ST and FC connector without clip.

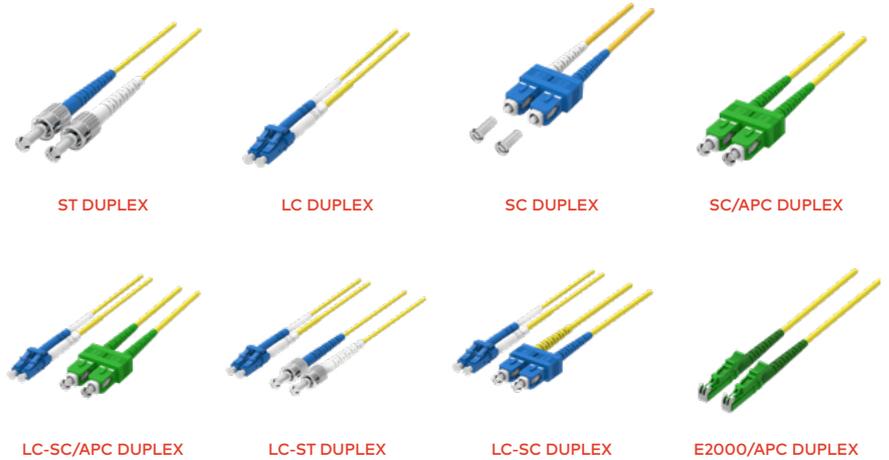

## STANDARDS

•ISO/IEC 11801; EN 50173-1; IEC 61754-1; IEC 61753-1; IEC 61300;



## CONNECTOR PROPERTIES

	ST	SC	LC	SC/APC	E2000/APC
Insertion Loss (dB)	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
Return Loss (dB)	> 50	> 50	> 50	> 60	> 60
Fiber Ferrule (mm)	Ceramic 2.5	Ceramic 2.5	Ceramic 1.25	Ceramic 2.5	Ceramic 2.5
Connector Housing	Zinc alloy	Composite	Composite	Composite	Composite
Connector Design	EC60874-10-1997	IEC61754-4	IEC61754-20	IEC61754-4	-

## CABLE PROPERTIES

	ST	SC	LC	SC/APC	E2000/APC
Attenuation (dB @ 1310nm)	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5
Attenuation (dB @ 1550nm)	≤ 0.4	≤ 0.4	≤ 0.4	≤ 0.4	≤ 0.4
Radius of Curvature (mm)	10≤r≤25	10≤r≤25	7≤r≤25	10≤r≤25	10≤r≤25
Fiber Height (nm)	-100≤h≤100	-100≤h≤100	-100≤h≤100	-100≤h≤100	-100≤h≤100
Durability	500 times				
Repetitiveness (dB)	≤ 0.2	≤ 0.2	≤ 0.2	≤ 0.2	≤ 0.2
Number of Fibers	2	2	2	2	2
Weight (kg/km)	8	8	8	8	8
Outer Diameter WxH (mm)	2.00x2	2.00x2	2.00x2	2.00x2	2.00x2
Outer Sheath Colour	Yellow	Yellow	Yellow	Yellow	Yellow
Outer Sheath Material	LSZH	LSZH	LSZH	LSZH	LSZH

## MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

	ST	SC	LC	SC/APC	E2000/APC
Installation Temperature (°C)	-10 to +60				
Operating Temperature (°C)	-10 to +60				
Storage Temperature (°C)	-40 to +80				
Tension - Long Term (N)	100	100	100	100	100
Tension - Short Term (N)	200	200	200	200	200

## PART NUMBER BREAKDOWN - ORDER INFORMATION

8 1 2 1 2 **A A** **B B** **M M**

1st CONNECTOR	<b>A A</b>	2nd CONNECTOR	<b>B B</b>	METERS	<b>M M</b>
SC	0 2	SC/APC	0 1	1	0 1
ST	0 3	SC	0 2	2	0 2
LC	0 5	ST	0 3	3	0 3
b2000/APC	0 7	LC	0 5		
		b2000/APC	0 7		



As part of our goal to achieve quality excellence, our barpa System Warranty can give you 25 years products and solution assurance of compliance with the industry performance standard comparing with the class installed. This warranty applies to network infrastructure installations that was made by an approved barpa Partner using an barpa solution (end-to-end). For more informations go to our website.